


Product Specifications

FlashLink Certified Vaccine Data Logger with Glycol Bottle

Measurement Range	-40°F to 104°F (-40°C to 40°C)
Display Resolution	0.1°F/°C
Accuracy within Normal Operating Range	±1.0°F from 14°F to 77°F (±0.5°C from -10°C to 25°C)
Data Capacity	32,496 data points
Data Download Time	2 seconds typical for 3823 points
Programmable Alarm Levels	High & Low levels over entire range, displayed on LCD
Battery	Coin Cell Lithium battery, % remaining power indicator on LCD
Dimensions/Body	1.575" x 3.189" x .575" (40mm x 81mm x 15mm)
Logger Casing	ABS plastic
External Sensor	5mL PETG* sterile bottle – 21CFR compliance information available, 9.84 ft./3m cable
Glycol Buffer	Propylene glycol (GRAS** classified)
Weight	2.56 oz. (70 grams)
Certification	CE Mark, NIST traceable, RoHS Compliant
Display	LCD, Red LED Alarm
Waterproof Rating	IP64 (with silicone cap)
Storage conditions	-4°F to 122°F (-20°C to 50°C) 0% to 95% RH w/o condensation
Shelf Life	2 Years
Min. System Requirements	Windows PC with current operating system
Download Requirements	Direct USB connection to PC, FlashPDF Program Manager Software V4.5 or higher, Adobe Reader
<p>*Polyethylene terephthalate copolymer **Generally Recognized As Safe</p>	

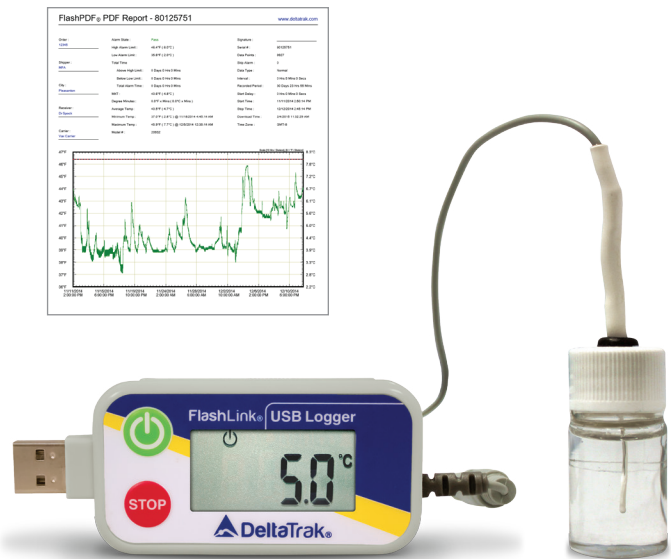

Model	
20938	Includes ISO 17025 Calibration Certificate from A2LA accredited lab, valid for 2 years & Manufacturer's Certificate of Compliance

- WHO prequalified under PQS Code E006/026
- Compatible with FDA and CDC guidelines
- 21 CFR Part 11 compliant
- Single external temperature sensor
- Glycol buffered probe emulates products and prevents false alarms
- Ideal for monitoring storage refrigerators and freezers
- User programmable: logging intervals, hi/low alarms
- Large, easy to read LCD
- Red flashing LED alarm for temperature excursions
- Low battery indicator on LCD

DeltaTrak manufactures products under an ISO 9001:2008 registered quality management system

SS0141_15H1

